Sensor Tap – All-In-One












CAT 673031 All-in-one – Stainless Steel Wall Mounted

Features

Up to 70% water saved
Hygienic with zero cross contamination
Touch free and accessible activation
"Plug and play" digital infrared sensor
technology
Sensing range automatically adjusts to
your environment
Easy installation and supplied with
everything required, replaces existing ½"
connections
Fully sealed all-in-one unit, no external
components or wiring, 4 x AA batteries



Dimensions


Spout – 24cm long Tap: 6 x 24 x 4cm, 0.7kg Boxed: 27 x 8 x 8cm, 0.8kg

Includes


All-in-one unit (solenoid valve, battery housing & brass housing)
Instruction manual

Specifications

Wall Mounted
Stainless Steel
Fully sealed (all-in-one unit)
Standard ½" Connection
10cm Pre-set Sensing Range
Water Pressure: 0.07-0.7Mpa

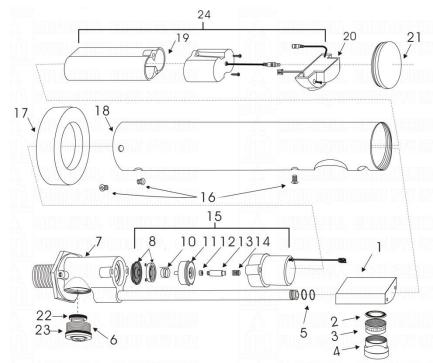

Available Finishes



CAT 673031B – Matte Black















Sensor Tap - Tube Design












CAT 67305 Tube Design - Chrome Plated Wall Mounted

Features

Up to 70% water saved Hygienic with zero cross contamination Touch free and accessible activation "Plug and play" digital infrared sensor technology Sensing range automatically adjusts to your environment Easy installation and supplied with everything required, replaces existing 1/2" connections No electrical wiring required, 4 x AA batteries or 240V transformer



Dimensions

Tube spout - 22cm long Tap: 10 x 22 x 3cm, 0.5kg Boxed: 28 x 22 x 9cm, 1.4kg

Includes

Tube spout with fitted sensor Solenoid box (fitted solenoid valve and battery housing, batteries not supplied) Optional 240V transformer **Braided hose**

Specifications

Instruction manual

Wall Mounted Chrome Plated Standard 1/2" Connection

10cm Pre-set Sensing Range Water Pressure: 0.07-0.7Mpa

Available Finishes




CAT 67305 - Chrome Plated



CAT 67305B – Matte Black



CAT 67305G - Gold

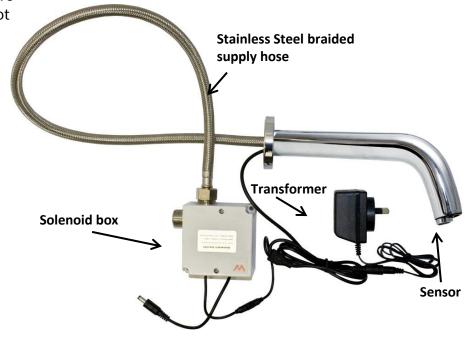

















Sensor Tap – Hospital Spout 18cm











CAT 67910 Hospital Spout 18cm - Chrome Plated Deck Mounted

Features

Up to 70% water saved
Hygienic with zero cross contamination
Touch free and accessible activation
"Plug and play" digital infrared sensor
technology
Sensing range automatically adjusts to
your environment
Easy installation and supplied with
everything required, replaces existing ½"
connections
No electrical wiring required, 4 x AA
batteries or 240V transformer



Dimensions

Hospital Spout - 18 cm high Tap: 18 x 16 x 5 cm, 0.5 kg Boxed: 28 x 22 x 10 cm, 1.3 kg

Transformer

Includes


Hospital spout with fitted sensor Solenoid box (fitted solenoid valve and battery housing, batteries not supplied) Optional 240V transformer Braided hose Instruction manual


Specifications


Deck Mounted Chrome Plated Standard ½" Connection 10cm Pre-set Sensing Range Water Pressure: 0.07-0.7Mpa

Steel bolt and Plastic screw cap Stainless Steel braided supply hose

Available Finishes













MEFE Sensor Taps are WaterMark certified and have been awarded 6 Stars, the highest WELS water efficiency rating. This signifies that our taps are eco-friendly and of the highest quality being AUS and NZ certified.

Our range is DDA compliant when installed in accordance with AS 1428.1 2009.











Solenoid box

Sensor Tap - Hospital Spout 32cm



CAT 6791032

Hospital Spout 32cm - Chrome Plated Deck Mounted

Features

Up to 70% water saved
Hygienic with zero cross contamination
Touch free and accessible activation
"Plug and play" digital infrared sensor
technology
Sensing range automatically adjusts to
your environment
Easy installation and supplied with
everything required, replaces existing ½"
connections
No electrical wiring required, 4 x AA
batteries or 240V transformer

Includes

Hospital spout with fitted sensor Solenoid box (fitted solenoid valve and battery housing, batteries not supplied) Optional 240V transformer Braided hose Instruction manual

Specifications


Wall Mounted Chrome Plated Standard ½" Connection 10cm Pre-set Sensing Range Water Pressure: 0.07-0.7Mpa

Available Finishes

CAT 6791032 – Chrome Plated


CAT 6791032B – Matte Black

CAT 6791032G – Gold



Dimensions

Hospital Spout - 32cm high Tap: 32 x 16 x 5cm, 0.6kg Boxed: 42 x 22 x 10cm, 1.5kg

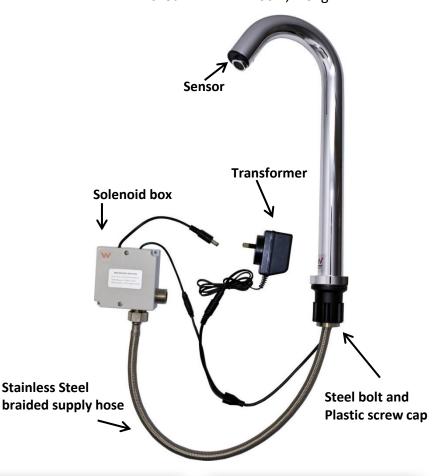

















Sensor Tap - Classic Curve Neck









CAT 67911 Classic Curve Neck - Chrome Plated Deck Mounted

Features

Up to 70% water saved
Hygienic with zero cross contamination
Touch free and accessible activation
"Plug and play" digital infrared sensor
technology
Sensing range automatically adjusts to
your environment
Easy installation and supplied with
everything required, replaces existing ½"
connections
No electrical wiring required, 4 x AA
batteries or 240V transformer

diameter = 6cm

Dimensions

Curve Neck Spout - 15cm high Tap: 15 x 18 x 6cm, 1.2kg Boxed: 28 x 22 x 9cm, 2.1kg

Includes

Curve spout with fitted sensor Solenoid box (fitted solenoid valve and battery housing, batteries not supplied) Optional 240V transformer Braided hose Instruction manual

Specifications

Deck Mounted Chrome Plated Standard ½" Connection 5 – 22cm Sensing Range Water Pressure: 0.07-0.7Mpa



Available Finishes



CAT 67911 – Chrome Plated



CAT 67911B – Matte Black















Sensor Tap – Hot & Cold Mixer










CAT 67913

Hot & Cold Mixer - Chrome Plated Deck Mounted

Features

Up to 70% water saved Hygienic with zero cross contamination Touch free and accessible activation "Plug and play" digital infrared sensor technology Sensing range automatically adjusts to your environment Easy installation and supplied with everything required, replaces existing 1/2" connections No electrical wiring required, 4 x AA batteries or 240V transformer



Curve Neck Spout - 13cm high Tap: 13 x 18 x 6cm, 1.1kg Boxed: 27 x 25 x 11cm, 2.1kg

Includes

Curve Neck spout with fitted sensor Battery pack (batteries not supplied) Optional 240V transformer 2 x Braided hoses 2 x Stop Valves Red and Blue Stickers Instruction manual

Specifications


Deck Mounted Chrome Plated Standard 1/2" Connection 5 – 22cm Sensing Range Water Pressure: 0.07-0.7Mpa

Available Finishes

CAT 67913 – Chrome Plated

CAT 67913B - Matte Black



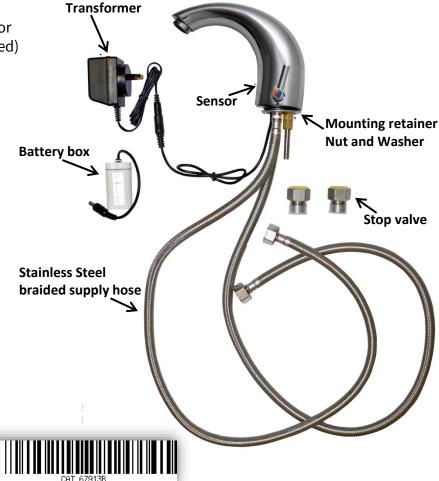











Sensor Tap – Tall Upright **MEFE** Licence No. 1718

Mitchell Engineering Food Equipment Pty Ltd

CAT 67917 Tall Upright – Stainless Steel **Deck Mounted**

Features

Up to 70% water saved Hygienic with zero cross contamination Touch free and accessible activation "Plug and play" digital infrared sensor technology Sensing range automatically adjusts to your environment Easy installation and supplied with everything required, replaces existing 1/2" connections No electrical wiring required, 4 x AA batteries or 240V transformer

Includes


Upright spout with fitted sensor Solenoid box (fitted solenoid valve and battery housing, batteries not supplied) Optional 240V transformer **Braided hose**

Specifications

Instruction manual

Deck Mounted Stainless Steel Standard 1/2" Connection 5 – 22 Sensing Range Water Pressure: 0.07-0.7Mpa


Available Finishes



CAT 67917B- Matte Black








Dimensions

Tall Upright Spout - 18.5cm high Tap: 18.5 x 16 x 3.5cm, 0.7kg Boxed: 28 x 22 x 10cm, 1.4kg

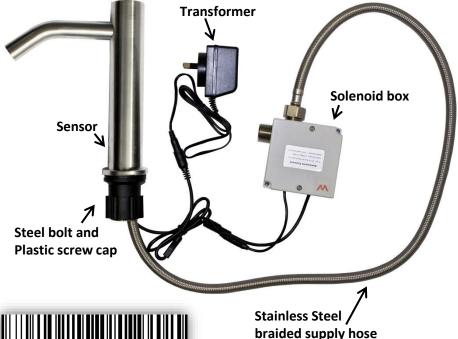

MEFE Sensor Taps are WaterMark certified and have been awarded 6 Stars, the highest WELS water efficiency rating. This signifies that our taps are eco-friendly and of the highest quality being AUS and NZ certified. Our range is DDA compliant when installed in accordance with AS 1428.1 2009.





info@mefe.com.au www.mefe.com.au Tel: 07 3283 4536 Fax: 07 3283 4482



Sensor Tap - Boomerang










CAT 679178 Boomerang – Stainless Steel Deck Mounted

Features

Up to 70% water saved
Hygienic with zero cross contamination
Touch free and accessible activation
"Plug and play" digital infrared sensor
technology
Sensing range automatically adjusts to
your environment
Easy installation and supplied with
everything required, replaces existing ½"
connections
No electrical wiring required, 4 x AA
batteries or 240V transformer



Dimensions

Boomerang Spout - 20cm high Tap: 20 x 18 x 5cm, 0.5kg Boxed: 25 x 22 x 6cm, 1.3kg

Includes

Boomerang spout with fitted sensor Solenoid box (fitted solenoid valve and battery housing, batteries not supplied) Optional 240V transformer Braided hose Instruction manual

Specifications

Deck Mounted
Stainless Steel
Standard ½" Connection
10cm Pre-set Sensing Range
Water Pressure: 0.07-0.7Mpa

Sensor Nut and Mounting rod Stainless Steel braided supply hose

Available Finishes



CAT 679178S – Satin Finish

CAT 679178B – Matte Black















